



Tapes & Specialties



Graphic Arts



Table of Contents

Artist Tape Premium Flatback Paper Tape	Page 1
Pro® 795 General Purpose Masking Tape	Page 1
Pro® Premium Mask Black pH Neutral Paper Tape	Page 1
Pro® 796 pH Neutral Masking Tape	Page 2
Pro® 46 Colored Masking Tape	Page 2
Pro® Drafting Tape Low Tack Premium Tape	Page 2
Pro® Black Photo Tape Photographic Masking Tape	Page 3
Pro® Ultimate Masking Tape Water Color Masking Tape	Page 3
Pro® Scenic Blue Mask 14 Day Easy Release Masking Tape	Page 3
Pro® 4000 Paper Application Tape	Page 3
Pro® 185 Flatback Paper Tape	Page 4
Pro® 183 Kraft Paper Tape	Page 4
Pro® 184HD Kraft Paper Tape	Page 4
Pro Gaff® Vinyl Coated Cloth Tape	Page 5
Pro® Pocket Gaff Retail Pack	Page 5
Pro® Pocket Cool Camo Gaff	Page 5
Pro® Duct 110 Poly Coated Cloth Tape	Page 6
Pro® Duct 139 Fluorescent Colored Duct	Page 6
Pro® Duct 160 Clear Duct Tape	Page 6
Pro® Framers Tape pH Neutral	Page 7
Pro® 140 Natural Cotton Cloth Tape	Page 7
Pro® Cloth Book Repair	Page 7
Shurtape® P68 Poly Coated Cloth Tape	Page 8
Shurtape® J-LAR Library Clear to the Core	Page 8
Pro® J-LAR II Clear Book Repair Tape	Page 8
Pro® 99 Fiber Filled Paper Tape	Page 9
Pro® Sheen Decorative Film Tape	Page 9
Pro® 154 ATG 2 Mil ATG	Page 10

Pro® 156 ATG 5 Mil ATG	Page 10
Pro® 410 ATG Tape Strong pH Neutral ATG	Page 10
Pro® ATG HD Dispenser	Page 10
Pro® Fillet Tape pH Neutral Tape	Page 11
Pro® Stitchery Tape Sports Jersey Tape	Page 11
Pro® Safe Mount Low Tack/High Tack	Page 11
Pro® 155 ATG 2 Mil Transfer Tape	Page 12
Pro® 156 5 Mil Transfer Tape	Page 12
Pro® 400 Double Coated Crepe Paper Tape	Page 12
Pro® 406 Double Coated Film Tape	Page 12
Pro® 3032 1/32" Double Coated Foam Tape	Page 13
Pro® 3016 1/16" Double Coated Foam Tape	Page 13
Pro® 3008 1/8" Double Coated Foam Tape	Page 13
Pro® 5110G 45 Mil Grey Extreme High Bond	Page 14
Pro® 5100C 40 Mil Clear Extreme High Bond	Page 14
Pro® 5110W 45 Mil White Extreme High Bond	Page 14
Pro® 5050C 20 Mil Clear Extreme High Bond	Page 14
Pro® Seal 300 Polypropylene Carton Sealing	Page 15
Pro® Taper 300 Carton Sealing Dispenser	Page 15
Pro® 919 Polypropylene Carton Sealing	Page 15
Pro® 180 Economy Filament Tape	Page 15
Pro® Measurement Tape	Page 16
Pro® Chart Tape Premium Flatback Tape	Page 16
Pro® Fast Adhesive Backed Hook & Loop Fastener	Page 16
UGlu®	Page 17-18
Pro Glow®	Page 19
Packaging & Finishing Solutions	Page 20



Artist Tape

Premium Flatback Paper Tape



Artist Tape is a premium flatback paper tape that is used for color coding and labeling. Artist Tape is printable with: flexo inks, markers, pens and pencils.

Colors: White, Blue, Black, Green, Orange, Yellow, Red, FL Orange, FL Green, FL Pink, FL Yellow

Specifications: ASTM D6123/D6123M-07, Type II. ASTM D-4236 (except fluorescent colors)

Technical Specs

Made in the USA

Backing: Flatback Paper	Adhesive: Synthetic Rubber
Total Thickness: 5.8 mils	Temperature Range: 40°F to 150°F
Tensile Strength: 30 lbs. per inch	Elongation: 2.5%
Adhesion to steel: 57 oz. per inch	

Pro® 795

General Purpose Masking Tape



Pro® 795 is a general purpose masking tape. Pro® 795 provides excellent adhesion to a wide variety of surfaces in a number of fields including, light bundling, packaging and closing and light duty masking.

Colors: Natural

Specifications: ASTM D 6123/D 6123M-97 (2012), Type I

Technical Specs

Made in the USA

Backing: Crepe Paper	Adhesive: Solvent Based Natural Rubber
Total Thickness: 4.3 mils	Temperature Range: 60°F to 150°F
Tensile Strength: 16 lbs. per inch	Adhesion to steel: 35 oz. per inch

Pro® Premium Mask Black

pH Neutral Paper Tape



Pro® Premium Black Mask tape is a medium crepe paper masking tape coated with pressure sensitive rubber based pH Neutral adhesive. Pro® Premium Black Mask is designed for light-weight packaging, bag locking, decorative edging and marking. Pro® Premium Black Mask can be used in masking off areas in acrylic and watercolor painting.

Colors: Black

Technical Specs

Made in the USA

Backing: Medium Crepe Paper	Adhesive: Synthetic Rubber/Resin
Total Thickness: 5.7 mils	Temperature Range: 40°F to 150°F
Tensile Strength: 19 lbs. per inch	

Pro® 796
pH Neutral Masking



Pro® 796 is a premium grade, highly versatile, pH Neutral masking tape. Pro® 796 is ideal tape for light-duty packaging. Pro® 796 can also be used for paint masking, general sealing, and holding, reinforcing and splicing applications.

Colors: Natural

Specifications: A-AA883-B Type L PPP-T-42C Type L

Technical Specs

Backing: Crepe Paper	Service Temperature: 340°F for 30 minutes
Total Tape Thickness: 6.5 mils	Adhesive: Natural Rubber/Resin
Adhesion to steel: 35 oz. per inch	Tensile strength: 25 lbs. per inch

Pro® 46
Colored Masking Tape



Pro® 46 is a rubber based colored crepe paper tape. Pro® 46 is used on a wide variety of smooth substrates as a printed or unprinted general purpose tape. Pro® 46 can be used for packaging, bundling, binding, holding, splicing, banding, labeling, color coding, decorating and identification.

Colors: Black, Light Blue, Green, Orange, Red, White, Yellow, Grey, Dark Blue, Dark Green, Pink, Purple.

Specifications: ASTM D6123/D6123M-07, Type II. Conforms to ASTM D-4236

Technical Specs

Made in the USA

Backing: Colored Crepe Paper	Adhesive: Rubber
Total Thickness: 4.7 mils	Temperature Range: 60°F to 150°F
Tensile Strength: 18 lbs. per inch	Adhesion to steel: 33 oz. per inch

Pro® Drafting Tape
Low Tack Premium Tape



Pro® Drafting Tape is an industrial grade masking tape with a specially formulated adhesive system, designed for the drafting and stationary trades. Pro® Drafting Tape minimizes residues and resists water solvents and oils along with having an excellent shelf-life.

Colors: Natural

Specifications: UU-T-93D, AA-194-C

Technical Specs

Made in the USA

Backing: Crepe Paper	Adhesive: Rubber Resin
Total Thickness: 7.0 mils	Tensile Strength: 18 lbs. per inch
Elongation: 7%	Adhesion to steel: 18 oz. per inch



Pro® Photo

Photographic Masking Tape



Pro® Photo tape is a paper photographic masking tape. Pro® Photo tape is engineered for quality photographic reproduction work, such as cropping and edging negatives; positioning negatives for contact printing; sealing camera bellows and film holders against light leaks.

Colors: Black

Technical Specs

Made in the USA

Backing: Impregnated Paper	Adhesive: Synthetic Rubber
Total Thickness: 6.1 mils	Tensile Strength: 21 lbs per inch
Elongation: 7%	Adhesion to steel: 50 oz. per inch

Pro® Ultimate Masking Tape

Water Color Masking Tape



Pro® Ultimate Masking Tape is a 3.6 mil thick premium masking tape. Pro® Ultimate Masking tape can be used for frisket masking and is perfect for masking areas of art, scrapbooking projects or any delicate surface. Pro® Ultimate Masking Tape is excellent for water color masking and great for painting clean hard lines.

Colors: Yellow

Technical Specs

Made in the USA

Backing: Smooth Paper	Adhesive: Acrylic
Total Thickness: 3.6 mils	Temperature Range: 180°F for 30 min.
Tensile Strength: 23 lbs. per inch	Elongation: 4.5%
Adhesion to steel: 14 oz. per inch	

Pro® Scenic Blue Mask

14 Day Easy Release Masking Tape



Pro® Scenic 714 Blue Mask is a 14-day painter's tape. Pro® Scenic 714 Blue Mask should be used wherever masking will be exposed to outdoor conditions and interior masking of windows (where adhesive will be directly exposed to sunlight). Pro® Scenic 714 Blue Mask is compatible for use on lacquer or polyurethane - coated surfaces, unfinished wood, wallpaper, and new, unpainted, or freshly painted wallboard.

Colors: Blue

Specifications: ASTM D6123 / D6123M-97 (2012) Type 1

Technical Specs

Made in the USA

Backing: Fine Structured Crepe Paper	Adhesive: Synthetic Rubber
Total Thickness: 5.7 mils	Temperature Range: 50°F to 200°F
Tensile Strength: 32 lbs. per inch	Elongation: 7%
Adhesion to steel: 26 oz. per inch	

Pro® 4000

Paper Protection Tape



Pro® 4000 is a medium tack paper application tape for vinyl graphics used in sign making and surface protection. The product consists of self-wound, standard grade saturated backing coated with a specially formulated latex pressure sensitive adhesive. Pro® 4000 is typically used for medium and large plotter and die-cut graphics. Pro® 4000 works well with pre-spaced lettering 2-12", small one piece decals and mid-sized line striping.

Technical Specs

Backing: White Translucent Latex Saturated Paper	
Adhesive: Water Based Natural Latex	Total Thickness: 4.0 mils
Elongation: 3%	Adhesion to steel: 11.15 oz. per inch

Pro® 185
Flatback Paper Tape



Pro® 185 is a high-grade flatback paper tape designed to offer a positive seal and excellent adhesion to minimize carton sealing failures and prevent pilferage. Pro® 185 has an aggressive synthetic rubber based adhesive. Pro® 185 can be used for carton sealing, packaging, silk screening, picture framing, splicing, and tabbing.


Colors: Brown

Specifications: PPP-T-42C Type II, and C.I.D. A-A-883B Type II

Technical Specs

Made in the USA

Backing: Kraft Flatback	Adhesive: Natural/Synthetic Rubber Blend
Total Thickness: 7.3 mils	Temperature Range: 60°F to 175°F
Tensile Strength: 40 lbs. per inch	Elongation: 7%
Adhesion to steel: 58 lbs. per inch	

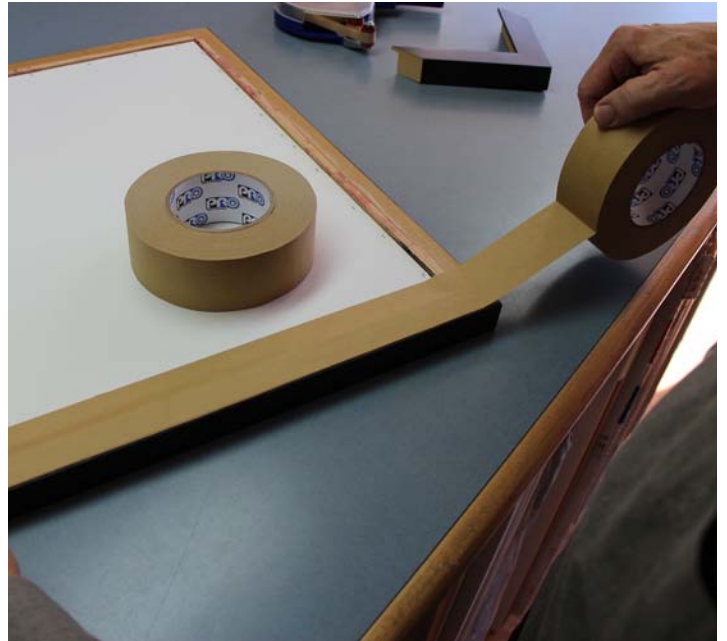

Pro® 185 being used in custom picture framing

Pro® 183
Kraft Paper Tape



Pro® 183 is a kraft flatback paper carton sealing tape with good tensile strength. Pro® 183 is recommended for the following applications: light-to-medium carton sealing, packaging, picture framing, splicing and tabbing.

Colors: Light Brown

Technical Specs

Backing: Paper	Adhesive: Rubber Resin
Total Thickness: 6.0 mils	Tensile Strength: 38.6 lbs. per inch
Elongation: 9%	Adhesion to steel: 37.8 oz. per inch

Pro® 184HD
Kraft Paper Tape



Pro® 184HD is a high tensile kraft flat back paper carton sealing tape. Pro® 184HD is a high tensile kraft paper carton sealing tape for standard and heavy duty packaging. Pro® 184HD was developed for sealing boxes for the "moving" industry, where high hold and easy tearing is required. It can also be used to make roll-to-roll splices on the paper and paperboard industries for high tension and temperature demanding processes.

Colors: Dark Brown

Technical Specs

Backing: Paper	Adhesive: Rubber Resin
Total Thickness: 6.5 mils	Tensile Strength: 56 lbs. per inch
Elongation: 3%	Adhesion to steel: 68.1 oz. per inch



Pro Gaff®

Vinyl Coated Cloth Tape



Pro Gaff® is a matte cloth tape with a rubber based adhesive system. Pro Gaff® is used for temporary holding of light fixtures, wire and cable hold down, dance floor splicing, bundling of cables, marking and labeling equipment cases. Pro Gaff® is available in 20 colors making it easy to match to any carpet color and high visibility colors are ideal for marking of stairs, exits or sets.

Colors: Black, White, Blue, Electric Blue, Green, Purple, Yellow, Red, Tan, Teal, Olive Drab, Brown, Burgundy, Grey, FL Green, FL Orange, FL Yellow, FL Pink, FL Blue, Chroma-Green

Technical Specs

Made in the USA

Backing: Cotton Cloth	Adhesive: Synthetic Rubber
Total Thickness: 11.0 mils	Temperature Range: 50°F to 180°F
Tensile Strength: 50 lbs. per inch	Elongation: 4%
Adhesion to steel: 75 oz. per inch	

Pro® Pocket Gaff Retail Pack



Pro® Pocket Gaff Retail Pack is a rubber based impregnated cloth tape with a matte finish conveniently packaged for retail use with UPC barcode, blister card, and hang tab. Just like Pro Gaff®, the pocket version is used for temporary holding of light fixtures, wire and cable hold down, dance floor splicing, bundling of cables, marking and labeling equipment cases.

Colors: Black, White, Blue, Electric Blue, Green, Purple, Yellow, Red, Tan, Teal, Olive Drab, Brown, Burgundy, Grey, FL Green, FL Orange, FL Yellow, FL Pink, FL Blue, Black and White

Technical Specs

Made in the USA

Backing: Cotton Cloth	Adhesive: Synthetic Rubber
Total Thickness: 11.0 mils	Temperature Range: 50°F to 180°F
Tensile Strength: 50 lbs. per inch	Elongation: 4%
Adhesion to steel: 75 oz. per inch	Core: 1" ID

Pro® Pocket Cool Camo Gaff



Pro® Pocket Cool Camo is a 1" & 2" wide roll of matte cloth tape printed with a camouflage pattern conveniently packaged "retail ready" with clamshell pack and hang-tab. Pro® Pocket Cool Camo Retail Clamshell Pack can be used for hockey and athletic tape, color coding, arts and crafts, book binding, wire and cable bundling, seat repair, party decorations, personalizing luggage, seaming and general purpose protection.

Colors: FL Green, FL Orange, FL Yellow, FL Pink, FL Blue, Purple, Teal

Technical Specs

Made in the USA

Backing: Cotton Cloth	Adhesive: Synthetic Rubber
Total Thickness: 11.0 mils	Temperature Range: 50°F to 180°F
Tensile Strength: 50 lbs. per inch	Elongation: 4%
Adhesion to steel: 75 oz. per inch	Core: 1" ID

Pro® Duct 110
Poly Coated Cloth Tape



Pro® Duct 110 is a 9 mil general purpose duct tape. Pro® Duct 110 is used for bundling, patching, mending, color coding, general repair and heavy-duty box sealing.

Colors: Black, Blue, Green, Red, Yellow, Olive Drab, Silver, Tan, White, Brown, Burgundy

Specifications: UL 723

Technical Specs **Made in the USA**

Backing: PE Coated Cloth	Adhesive: Natural Rubber
Total Thickness: 9.0 mils	Temperature Range: 40°F to 200°F
Tensile Strength: 24 lbs. per inch	Adhesion to steel: 70 oz. per inch

Pro® Duct 139
Fluorescent Colored Duct



Pro® Duct 139 is a 9 mil specialty grade duct tape available in 4 brilliant fluorescent colors. Applications include bundling, sealing cartons, binding books, repairing seats, color coding, splicing and repairing. Pro® Duct 139 is also used in the hospitality, motion picture, audio visual industry, motor sports and the floral industry.

Colors: FL Green, FL Orange, FL Yellow, FL Pink

Technical Specs **Made in the USA**

Backing: Waterproof, Polyethylene Film With a Cloth Carrier	
Adhesive: Natural Rubber	Total Thickness: 9.0 mils
Temperature Range: 50°F to 200°F	Tensile Strength: 22 lbs. per inch
Adhesion to steel: 50 oz. per inch	

Pro® Duct 160
Clear Duct Tape



Pro® 160 is a versatile, waterproof, poly/scrim duct tape that can be used in a wide range of sealing, joining and protecting applications. Pro® 160 is also used for repairing, binding and hinging.

Colors: Transparent

Technical Specs

Backing: Biaxially Oriented Polypropylene	Adhesive: Acrylic Resin
Total Thickness: 6.0 mils	Temperature Range: -20°F to 150°F
Tensile Strength: 36 oz. per inch	Elongation: 20%
Adhesion to steel: 32 oz. per inch	



Pro® Duct 110 used to personalize a mailbox for a weather resistant design



Pro® Framers Tape
pH Neutral



Pro® Framers tape is a premium polyethylene coated cloth tape. Pro® Framers tape was developed specifically for mounting, matting and framing artwork and prints.

Colors: White

Technical Specs

Made in the USA

Adhesive: Rubber Resin	Total Thickness: 11 mils
Tensile Strength: 35 lbs. per inch	Adhesion to steel: 75 oz. per inch
pH Neutral	

Pro® 140

Natural Cotton Cloth Tape



Pro® 140 is a polyester cotton blend pressure sensitive tape. Pro® 140 is used as a harness wrap tape and also can be used for bundling molding, coils, metals, and sealing of cans in the baking industry.

Colors: White

Technical Specs

Made in the USA

Backing: Polyester Cotton Blend	Adhesive: Rubber
Total Thickness: 10.0 mils	Tensile Strength: 36 lbs. per inch
Adhesion to steel: 28 oz. per inch	

Pro® Cloth Book Repair



Pro® Cloth Book Repair tape is a matte coated cloth tape that is water and abrasion resistant. The matte finish makes it esthetically preferable and easily conforms to the contour of book spines.

Colors: Black, Brown, Blue, Yellow, Burgundy, Electric Blue, Green, Grey, Purple, Red, Tan, White

Technical Specs

Made in the USA

Backing: Impregnated Cotton Cloth	Total Thickness: 11.0 mils
Temperature Range: 50°F to 180°F	Tensile Strength: 50 lbs. per inch
Elongation: 4%	Adhesion to steel: 75 oz. per inch

Shurtape® P68

Poly Coated Cloth Tape



Shurtape® P68 is a premium grade vinyl coated cloth tape. Some common applications for Shurtape® P68 include book binding and color coding.

Colors: Black, White

Specifications: CID A-A-1586A; PM-85 Tested; ANSI 45.2.2

Technical Specs

Made in the USA

Backing: Vinyl Coated Cloth	Adhesive: Synthetic Rubber
Total Thickness: 13.5 mils	Tensile Strength: 60 lbs. per inch
Adhesion to steel: 57 oz. per inch	

Shurtape® J-Lar Library



Shurtape® J-Lar Library is a hand tearable polypropylene clear-to-the-core tape. Shurtape® J-Lar Library is often used for over-lamination, label protection, light carton closure, paper repair or mending and holding applications. Shurtape® J-Lar Library is ideal for use with counter and desk dispenser units.

Colors: Clear-to-the-core

Technical Specs

Made in the USA

Backing: Biaxially Oriented Polypropylene Film	
Adhesive: Solvent Based Acrylic	Total Thickness: 2.6 mils
Temperature Range: -20°F to 180°F	Tensile Strength: 24 lbs. per inch
Adhesion to steel: 30 oz. per inch	

Pro® JLAR II

Clear Book Repair Tape



Pro® JLAR II is an optically clear polypropylene film coated with a non-yellowing acrylic adhesive. Pro® JLAR II is specifically designed for laminating and book repairs where clarity and strength are extremely important. It's also an industrial strength, brilliantly clear film tape developed for use in carton and package sealing, overlays and laminating and label protection.

Colors: Clear-to-the-core

Specifications: CID A-A-1684C

Technical Specs

Backing: Biaxially Oriented Polypropylene Film	
Adhesive: Solvent Based Acrylic	Total Thickness: 3.5 mils
Temperature Range: -20°F to 180°F	Tensile Strength: 40 lbs. per inch
Elongation: 140%	Adhesion to steel: 30 oz. per inch



Pro® 99

Non-Woven Polyester Film Tape



Pro® 99 is a polyester fiber (non-woven) film tape used for attaching book jacket covers. Pro® 99 can be used for general purpose sealing and attaching, especially used on treated paper overwraps and other hard-to-stick-to surfaces.

Colors: Natural

Specifications: UL Listed (E82910), Insulation class 130°C, Dielectric Strength 5,000 volts

Technical Specs

Made in the USA

Backing: 5 mils Polyester Film	Adhesive: Rubber Resin
Total Thickness: 5.0 mils	Tensile Strength: 60 lbs. per inch
Elongation: 100%	Adhesion to steel: 35 oz. per inch

Pro® Sheen

Decorative Film Tape



Pro® Sheen is a premium grade metalized polyester film in seven vibrant colors. Pro® Sheen can be used for decoration, color-coding, cueing and splicing.


Colors: Silver, Black, Blue, Gold, Red, Green

Specifications: Meets Federal specifications #LT-100B Type II.

Technical Specs

Backing: Metalized Polyester	Adhesive: Acrylic
Total Thickness: 2.1 mils	Temperature Range: Up to 300°F
Tensile Strength: 24 lbs. per inch	Elongation: 100%

Pro® 99

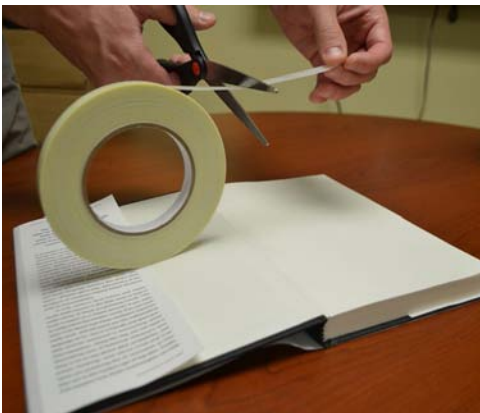

Polyester fiber tape used for attaching book jacket covers

Pro® 154 ATG
2 Mil ATG



Pro® 154 ATG is an excellent adhesive for flying splices on paper, films, and foil. This product can be used for laminating, mounting and nameplate applications, aluminum foil identification plates, and miscellaneous holding.

Colors: Transparent

Technical Specs

Made in the USA

Adhesive: 2 mil Acrylic	Total Thickness: 2.0 mils (without liner)
Temperature Range: -20°F to 150°F	Adhesion to steel: 32 oz. per inch

Pro® 156 ATG
5 Mil ATG



Pro® 156 ATG is a 5 mil adhesive transfer tape. Pro® 156 ATG can be used as a laminating adhesive for foam, fabrics, metal or plastic nameplates, and is an excellent product for splicing of films, fabrics and foils. It is also suited for joining materials with irregular or textured surfaces.

Colors: Transparent

Specifications: MIL-P-19834B

Technical Specs

Made in the USA

Adhesive: 5 mil Acrylic	Total Thickness: 9.0 mils (including liner)
Temperature Range: 70°F to 100°F	Adhesion to steel: 75 oz. per inch

Pro® 410 ATG Tape
Strong pH Neutral ATG



Pro® 410 ATG is a double coated non-woven adhesive transfer tape coated on both sides with an aggressive acrylic pressure sensitive adhesive. Pro® 410 ATG is used for bonding and laminating to a wide variety of cloths, vinyl's, corks, paper, rigid and flexible plastics. Pro® 410 ATG can be used for framing and mounting displays, such as signs, covers, posters, and nameplates. 1" ID Plastic Core. Compatible for use with our Pro® ATG HD Dispenser.

Colors: Transparent with white liner

Technical Specs

Carrier: Tissue	Adhesive: Solvent Based Acrylic
Total Thickness: 4.33 mils	Temperature Range: -4°F to 212°F
Tensile Strength: 142 lbs. per inch	Elongation: 3.5%
Adhesion to steel: 89 oz. per inch	

Pro® ATG HD Dispenser



Pro® ATG HD Dispenser is an Adhesive Transfer Tape Dispenser with extended nose works for all sizes.

Colors: Blue





Pro® Fillet Tape
pH Neutral Tape



Pro® Fillet tape is a double coated tape with an acrylic solvent based adhesive designed for attaching the fillet or slip to the picture mount in the framing industry. Pro® Fillet tape can also be used for mounting decorative trims and for permanent bonding to most substrates, such as metal, wood, glass, cement, PVC and other plastics. Pro® Fillet tape is also commonly used for fastening of nameplates to trophies, luggage tags and signs.

Colors: Transparent with white liner

Technical Specs

Carrier: PET	Adhesive: Acrylic
Total Thickness: 3.75 mils	Temperature Range: 50°F to 104°F

Pro® Stitchery Tape
Sports Jersey Tape



Pro® Stitchery tape is a double coated tape for stitchery mounting. Pro® Stitchery tape is a general purpose double coated acrylic based adhesive tape designed for bonding safely to delicate fabrics such as silk, linen and velvet. Pro® Stitchery tape is excellent for framing of sports jerseys.

Colors: Transparent with white liner

Technical Specs

Carrier: PET	Adhesive: Acrylic
Total Thickness: 3.75 mils	Temperature Range: 50°F to 104°F

Pro® Safe Mount
Low Tack/High Tack



Pro® Safe Mount is a double coated tape with an aggressive adhesive on one side and a clean removable adhesive on the other. Pro® Safe Mount for convenience is like "two tapes in one" and can be used for numerous everyday applications such as mounting decorations, posters, and children's artwork. Pro® Safe Mount is a multi-purpose tape that adheres to a variety of materials such as wood, vinyl, tile and drywall.

Colors: White

Technical Specs

Made in the USA

Backing: Fine Structured Crepe Paper	Adhesive: Synthetic Rubber
Adhesion to Steel: 27 oz. per in (Exposed side)	Thickness: 8.5 mil
Adhesion to Steel: 60 oz. per in (Liner side)	Tensile Strength: 21 lbs. per in
Elongation: 9%	

Pro® 155
2 Mil Adhesive Transfer Tape



Pro® 155 2 mil adhesive transfer tape is on a 3" I.D. core. Pro® 155 is an excellent adhesive for flying splices on paper, films, and foil. This product can be used for laminating, mounting and nameplate applications. Ideal for high processing temperatures. Ideally suited for use in printer's dry tunnels. Performance proven dependability promotes production line efficiencies in paper and film industries.

Colors: Transparent

Technical Specs

Made in the USA

Adhesive: Acrylic	Total Thickness: 2.0 mils (without liner)
Temperature Range: 10°F to 390°F	Adhesion to steel: 20 oz. per inch

Pro® 156
5 Mil Adhesive Transfer Tape



Pro® 156 5 mil adhesive transfer tape is on a 3" I.D. core. Pro® 156 can be used as a laminating adhesive for foam, fabrics, metal or plastic nameplates, and is an excellent product for splicing of films, fabrics and foils. Pro® 156 can also be used for joining materials with irregular or textured surfaces.

Colors: Transparent

Specifications: MIL-P-19834B

Technical Specs

Made in the USA

Adhesive: Acrylic	Total Thickness: 9.0 mils (including liner)
Temperature Range: 70°F to 100°F	Adhesion to steel: 75 oz. per inch

Pro® 400
Double Coated Crepe Paper Tape



Pro® 400 is a 3.5 mil impregnated crepe paper coated on both sides with 2.5 mils of rubber adhesive. The adhesive exhibits high tack and moderate shear properties. Pro® 400 is an economical, general purpose double coated tape with good tensile strength. Pro® 400 is also used for bonding and laminating to a wide variety of plastics, metals and papers.

Colors: Natural

Technical Specs

Made in the USA

Adhesive (liner and exposed side): Rubber	Liner: 60# White Densified Kraft
Carrier: 3.5 mil Yellow crepe paper	Total Thickness: 8.5 mils

Pro® 406
Double Coated Film Tape



Pro® 406 is a double coated polyester tape with rubber based adhesive. Pro® 406 is designed for bonding to a variety of polyurethane and polyethylene foams, felt, rubber, sponge, cork, abrasive materials and gasket materials.

Colors: Transparent with White Liner

Technical Specs

Adhesive: Rubber	
Liner: 60# Polycoated Lay-Flat Silicone Treated Release Liner	
Tensile strength: 10 lbs. per inch	Application Temperature: 41°F to 104°F



Pro® 3032

1/32" Double Coated Foam Tape



Pro® 3032 is a 1/32" white, closed cell polyethylene foam coated on both sides with an aggressive, rubber based pressure sensitive adhesive. Pro® 3032 is used for general purpose bonding applications.

Colors: White

Technical Specs

Made in the USA

Adhesive: Rubber	Total Thickness: 1/32 in
Temperature Range: up to 180°F	Tensile Strength: 213 lbs. per inch
Elongation: 355%	Adhesion to steel: 137 oz. per inch

Pro® 3016

1/16" Double Coated Foam Tape



Pro® 3016 is a 1/16" white, closed cell polyethylene foam coated on both sides with an aggressive, rubber based pressure sensitive adhesive. Pro® 3016 is used for general purpose bonding applications.

Colors: White

Technical Specs

Made in the USA

Adhesive: Rubber	Total Thickness: 1/16 in
Temperature Range: up to 180°F	Tensile Strength: 145 lbs. per inch
Elongation: 339%	Adhesion to steel: 137 oz. per inch

Pro® 3008

1/8" Double Coated Foam Tape



Pro® 3008 is a 1/8" white, closed cell polyethylene foam coated on both sides with an aggressive, rubber based pressure sensitive adhesive. Pro® 3008 is used for general purpose bonding applications.

Colors: White

Technical Specs

Made in the USA

Adhesive: Rubber	Total Thickness: 1/8 in
Temperature Range: -20°F to 165°F	Tensile Strength: 228 lbs. per inch
Elongation: 269%	Adhesion to steel: 80 oz. per inch

Extreme High Bond Tape

Pro® EHB (Extreme High Bond) is a modified acrylic foam adhesive tape. Pro® EHB tape is used in many permanent indoor and outdoor applications. EHB tape often replaces spot welds, rivets, nails, liquid adhesives and other permanent fasteners.

Technical Specs

Adhesive: Modified Acrylic	Temperature Range: Long term: 212°F to 248°F
Tensile Strength: 75-86 lbs. per inch	

Benefits:

- Thickness helps adhesion to irregular surfaces.
- Acrylic foam combines a high level of internal strength.
- Modified acrylic adhesive bonds well to metals, glass, painted surfaces and medium/low surface energy plastics.

Common Applications:

- Bonding, Vibration Dampening, Splicing, Permanent Fastener

Features:

- Bond Builds Over Time, Good Adhesion, Low Temperature Application, Short Term - High Temperature Resistance, Permanent Bond, Outdoor Use, Highly Conformable

Pro® 5110G



Pro® 5110G EHB (Extreme High Bond)

Colors: Grey on Red Liner

Total Thickness: 45 mils

Pro® 5100C



Pro® 5100C EHB (Extreme High Bond)

Colors: Clear on Red Liner

Total Thickness: 40 mils

Pro® 5110W



Pro® 5110W EHB (Extreme High Bond)

Colors: White on Red Liner

Total Thickness: 45 mils

Pro® 5050C



Pro® 5050C EHB (Extreme High Bond)


Colors: Clear on Red Liner

Total Thickness: 20 mils



Pro® Seal 300

Polypropylene Carton Sealing

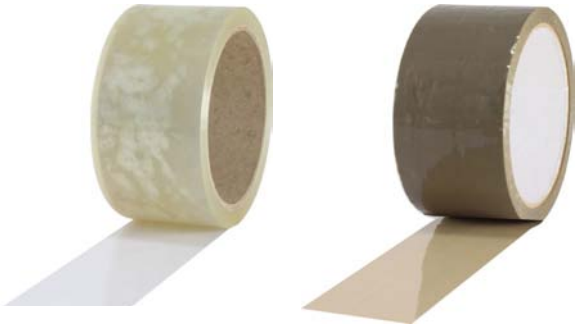

Pro® Seal 300 is a polypropylene general purpose carton sealing tape. Pro® Seal 300 is excellent for all general purpose hot melt carton sealing applications. Pro® Seal 300 is designed for smooth, easy dispensing.

Colors: Clear, Tan

Technical Specs

Backing: Biaxially-Oriented Polypropylene Film	
Adhesive: Synthetic Rubber / Resin	Total Thickness: 1.8 mils
Tensile Strength: 27 lbs. per inch	Elongation: 70%
Adhesion to steel: 32 oz. per inch	


Pro® Taper 300

Carton Sealing Tape Dispenser



Pro® 919

Polypropylene Carton Sealing

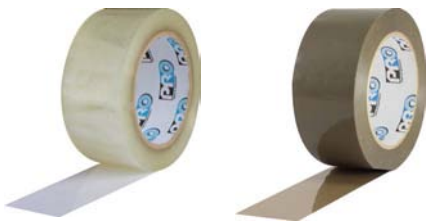

Pro® 919 is a heavy duty polypropylene film coated with a high tack adhesive designed for automatic packaging and carton sealing equipment lines. Pro® 919 is specifically designed for heavy duty carton sealing applications. Pro® 919 is designed for smooth easy dispensing either manually or automatically.

Colors: Clear, Tan

Specifications: Tan meets US military specification: PPP-T-60E Type III, Class 1. Clear is considered water resistant as per ASTM D5570 and also complies with the Federal Food, Drug and Cosmetic Act, CFR Title 21, Subpart B, Par. 175.105 (covers the use of pressure sensitive adhesives and tapes for 'indirect contact' food packaging, such as box sealing). CID A-A-1684B and ASTM D5486 Type III.

Technical Specs

Backing: Biaxially Oriented Polypropylene Film	
Adhesive: Rubber Resin	Total Thickness: 3.0 mils
Elongation: 140%	Adhesion to steel: 55 oz. per inch
Tensile Strength: 35 lbs. per inch (machine direction) 70 lbs. per inch (cross direction)	

Pro® 180

Economy Filament Tape



Pro® 180 is a filament reinforced strapping tape. Pro® 180 is a utility grade fiberglass reinforced tape designed for the majority of packaging, palletizing and unitizing applications.

Colors: Clear

Technical Specs

Made in the USA

Backing: Biaxially Oriented Polypropylene Film	Adhesive: Synthetic Rubber Resin
Total Thickness: 4.0 mils	Tensile Strength: 100 lbs. per inch
Elongation: 3%	Adhesion to steel: 48 oz. per inch

Pro[®] Metric Measurement Tape



Pro[®] Measurement Tape is a premium kraft paper tape used as an adhesive backed, repositionable ruler. Metric is perforated every 20 centimeters. This product is great for tough situations where you can't hold a tape measure.

Colors: Yellow Printed Black

Technical Specs

Made in the USA

Backing: Flatback Paper	Adhesive: Synthetic Rubber
Total Thickness: 5.8 mils	Temperature Range: 40°F to 150°F
Tensile Strength: 30 lbs. per inch	Adhesion to steel: 57 oz. per inch

Pro[®] Imperial Measurement Tape



Pro[®] Measurement Tape is a premium kraft paper tape used as an adhesive backed, repositionable ruler. Imperial is perforated every 12" (ruler). This product is great for tough situations where you can't hold a tape measure.

Colors: Yellow Printed Black

Technical Specs

Made in the USA

Backing: Flatback Paper	Adhesive: Synthetic Rubber
Total Thickness: 5.8 mils	Temperature Range: 40°F to 150°F
Tensile Strength: 30 lbs. per inch	

Pro[®] Chart Tape *Premium Flatback Tape*



Pro[®] Chart Tape is a premium flatback paper tape used for color coding, labeling and is printable with flexo inks, markers, pens and pencils. Pro[®] Chart tape removes cleanly and safely from sound and lighting boards and will not stain or ghost after removal. Pro[®] Chart Tape is designed for marking lines on charts, dry erase boards and maps.

Colors: Black, Blue, Green, Orange, Red, White, Yellow

Specifications: ASTM D6123/D6123M-07, Type II. ASTM D-4236

Technical Specs

Made in the USA

Backing: Flatback Paper	Adhesive: Synthetic Rubber
Total Thickness: 5.8 mils	Temperature Range: 40°F to 150°F
Tensile Strength: 30 lbs. per inch	Elongation: 2.5%
Adhesion to steel: 57 oz. per inch	

Pro[®] Fast

Adhesive Backed Hook & Loop Fastener



Pro[®] Fast is an adhesive-backed hook and loop fastener. Pro[®] Fast has a high performance hot melt adhesive and adheres to a wide variety of substrates. Pro[®] Fast performs well at both high and low temperatures. With Velcro[®]-like technology, Pro[®] Fast closure system can be applied to rigid surfaces or it can also be sewn into fabrics.

Colors: White, Black

Technical Specs

Loop Tack: 7 ounces	180 Peel Strength: 7 pli
Application Temperature: 40°F to 140°F	Performance Range: 0°F to 160°F



UGlu®

The Strength of Adhesive, The Convenience of Tape!

Instant Grip, Powerful Bond, No Mess Ever! A unique and innovative form of liquid adhesive that is both waterproof and weatherproof. This adhesive is in a convenient tape-like format and bonds to a wide variety of surfaces, including rough or uneven surfaces.

UGlu® features 20mil rubber based mounting adhesive offered in a wide variety of convenience size options including strips, patches, dashes and rolls. UGlu® is often used in the arts & crafts industry for mounting, bonding, securing and temporary holding.

Bonds to: fiberglass, metal, cement, brick, sealed wood, plastics, carpet, canvas, leather, foam, glass and ceramic. Can be cut to size and cleanly removed.

Colors: Transparent with White Liner

Adhesive: Rubber

Total Thickness: 20 mils

Non-toxic

Acid Free

pH Neutral

Made in the USA

UGlu® 200 Strips Family Pack



Technical Specs

Family Pack: (5) 1 in x 2 in, (5) 1 in x 3 in, (5) 1 in x 4 in	
Pcs/Case: 1080	Pcs/Pack: 15
Packs/Master: 72	

UGlu® 300 Power Patch



Technical Specs

Power Patch (5) 3in x 3in Strips	Pcs/Case: 720
Pcs/Pack: 5	Packs/Master: 144

UGlu® 500 Roll



Technical Specs

(5) 3in x 3in Strips	Pcs/Case: 240
Pcs/Pack: 5	Packs/Master: 48

UGlu® 600 Dashes Sheets



Technical Specs

Dash Sheets 1/2in x 5/8in squares	40 Dashes per sheet
4 Sheets per envelope/pack	160 Dashes per envelope/pack
144 packs per master	

*Not recommended for use on plastics.

UGlu®



UGlu® Dashes being used to assemble a decorative place setting

UGlu® 650 Dashes Roll



Technical Specs

Dash Roll, 1/2 in x 5/8 in squares	200 Dashes per Roll
Pcs/Pack: 1 roll	Packs/Master: 96

UGlu® 700 DIY Pack



Technical Specs

DIY Pack (1) 1 in x 60in Roll, (4) 1/2in x 5/8in Dash Sheets, (15) 1in x 3in Strips	
Pcs/Pack: 20	Packs/Master: 12

UGlu® 900 Contractor Pack



Technical Specs

Contractor Pack (250) 1 in x 3 in Strips	Pcs/Case: 1,500 sheets
Pcs/Pack: 250 roll	Packs/Master: 6

UGlu® Industrial Roll



Technical Specs

UGlu® 20mil 3/4x65FT Slit Imperial, Shrink wrapped with Front & Back Roll Label	
UGlu® 20mil 1x65FT Slit Imperial, Shrink wrapped with Front & Back Roll Label	

*Not recommended for use on plastics.



Pro Glow®

Pro Glow® has a non-radioactive chemical light source incorporated into a flexible vinyl film that glows in total darkness after exposure to artificial or natural light. The photoluminescent film light source is designed to absorb energy from any nearby ambient light such as fluorescent lamps or sunlight. Once the source of extraneous light is removed, Pro Glow® film immediately emits a light of its own. There is no limit to the number of times this product can be recharged. When fully charged, Pro Glow® provides positive luminance for up to 10 hours. Pro Glow® is designed for indoor safety and egress marking tapes and signage.

Colors: Glow

Specifications: Exceeds PSPA Class B standards


Technical Specs

Made in the USA

Backing: Vinyl Film	Total Thickness: 15.0 mils
Temperature Range: -20°F to 220°F	Adhesion to steel: 96 oz. per inch

Pro Glow®

Glow in the Dark Vinyl

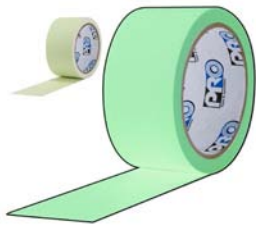


Pro Glow® Dots

Large & Small Roll Form




Pro Glow® Pocket Arrows

Retail Ready with Hang Tab

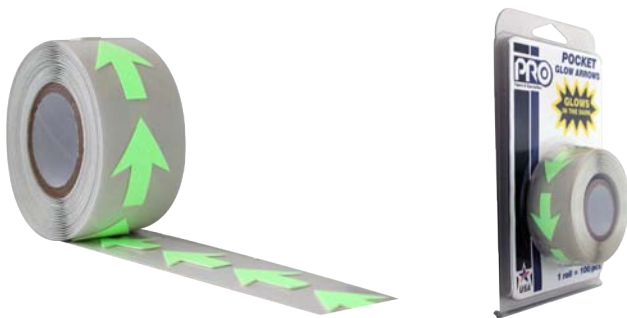

Pro Glow® Pocket Dots

Retail Ready with Hang Tab

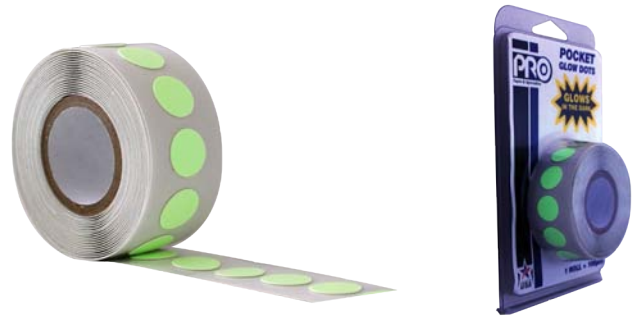



Why Partner with Pro Tapes®?

- 1 SHORTER LEAD TIMES AND LOWER MOQs**
We carry the largest pressure sensitive adhesive (PSA) inventory in the marketplace, which translates to shorter lead times and lower minimum order quantities.
- 2 WE'VE INVESTED TO BE CUTTING EDGE**
We've made substantial investments in fully-automated technology to be a leader in the converting and packaging of pressure sensitive adhesives.
- 3 YOUR GLOBAL SOLUTIONS PROVIDER**
We have a solution for all your tape needs, such as advanced converting services, new product development, custom die-cutting, product finishing or packaging configurations and procurement or inventory management.
- 4 TECHNICAL SUPPORT FROM EXPERIENCED STAFF**
Our product specialists are the most knowledgeable in the industry and can assist in application support and strategize on how to improve product quality and performance.
- 5 HELD TO THE HIGHEST STANDARDS**
We follow all industry best practices and are certified in ISO 9001 Standards, FDA Registered, GS1 Registered, IMDS Registered and EDI Compliant.

PACKAGING & FINISHING SOLUTIONS EXPERTS

- Private label branding
- Clear & printed sleeve wrapping
- Open & closed core shrink wrapping
- Bulk pack with silicone sheets
- Poly & zip lock bagging
- Sleeve, single tower & accordion style wrapping
- Blister & clamshell display packs
- In-house design & support
- Custom designs: core, boxes, sleeves, shrink wrap, roll label
- GS1 Registered UPC barcoding available
- Printed open core shrink wrap

CUSTOM PACKAGING CONFIGURATIONS AVAILABLE




Closed Core Shrink Wrap with Roll Label




Polybag with Hang Tab



Clamshell Packaging with Hang Tab & UPC Barcode

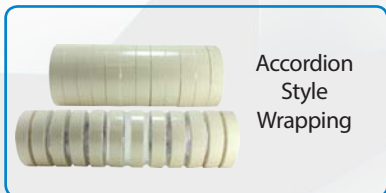

Accordion Style Wrapping

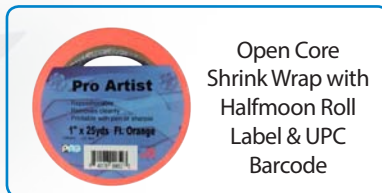

Open Core Shrink Wrap with Halfmoon Roll Label & UPC Barcode



Envelope Packaging with Hang Tab and UPC Barcode


WE SPECIALIZE IN RETAIL





Tapes & Specialties

Our Graphic Arts line carries a wide variety of tapes appealing to the Arts & Crafts, Framing and School & Library Supply industries.

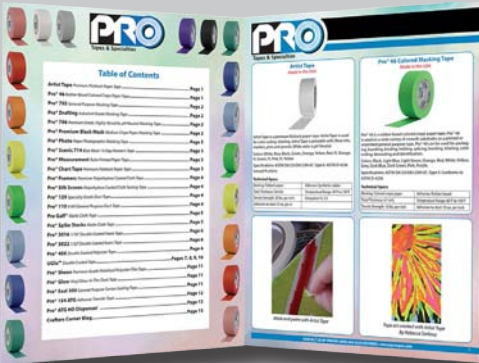

Arts & Crafts

Our Arts & Crafts product line offers a comprehensive selection of premium adhesive tapes for utility & decorative purposes. Our arts & crafts tapes, such as double sided decorative mylar tapes are ideal for fine art and DIY end-use.



Professional Framing Tapes

Our robust line of framing tapes are safe for mounting artwork, attaching dust covers to back of frames and sticking double mats together.



School & Library Supply

Our School & Library Supply product line offers a broad range of tapes that are safe to use on artwork, books and walls. Many of our tapes are user friendly, and ideal for students, teachers & librarians and conform to ASTM 4236.

Several of our tapes are engineered to be non-yellowing, clean removable, pH neutral & acid free. Whether masking, hinging, decorating, adhering, binding books, working on a mural or canvas, framing, or repairing books; Pro Tapes® is well stocked to be the only supplier for ALL your tape essentials.

Pro Tapes & Specialties Inc.®
621 Route 1 South
North Brunswick, NJ 08902

Toll Free: (800) 345-0234
Email: sales@protapes.com
www.protapes.com