



**Graphic Arts  
School & Library Supply**



**Tapes & Specialties**





## Table of Contents

Pro® Cloth Book Repair Tape .....	2
Pro Gaff® Wings .....	2
Pro® Clear Book Repair Tape .....	2
Pro® Clear Wings .....	2
UGlu® .....	3, 4
Pro® 795 .....	5
Pro® 796 .....	5
Pro® Premium Black Masking.....	5
Pro® 46 .....	6
Artist Tape .....	6
Pro® 154 ATG .....	7
Pro ATG HD Dispenser .....	7
Pro® 99.....	8
Pro® 180.....	8
Shurtape® Jlar .....	9
Cable Path® .....	9
Pro® Measurement (Imperial, Metric).....	9
Pro Glow® .....	10
Pro Glow® Dots .....	10
Pro® Sheen .....	10

## Pro® Cloth Book Repair Tape

Made in the USA



Pro® Cloth Book Repair Tape is a matte coated cloth tape that is water and abrasion resistant. It has a matte finish which makes it esthetically preferable and easily conforms to the contour of book spines.


Colors: Black, Brown, Blue, Yellow, Burgundy, Electric Blue, Green, Grey, Purple, Red, Tan, White

### Technical Specs

Backing: Impregnated cotton cloth	Adhesive: Synthetic Rubber Adhesive
Total Thickness: 11.0 mils	Temperature Range: 50°F to 180°F
Tensile Strength: 50 lbs per inch	Adhesion to steel: 75 oz per inch

## Pro Gaff® Wings

Made in the USA

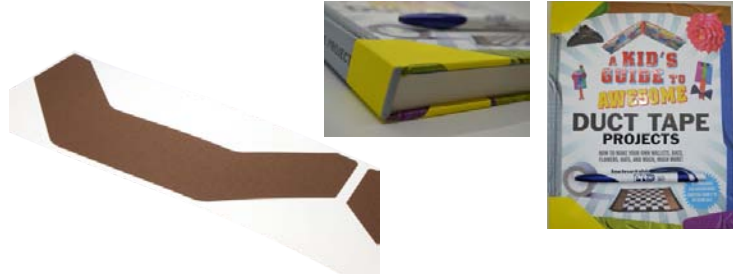


Pro Gaff® Wings is a die-cut book repair tape is a matte coated cloth tape that is water and abrasion resistant. It has a matte finish which makes it esthetically preferable and easily conforms to the contour of book spines.

Colors: Black, Brown, Blue, Yellow, Burgundy, Electric Blue, Green, Grey, Purple, Red, Tan, White

### Technical Specs

Backing: Impregnated cotton cloth	Adhesive: Synthetic Rubber Adhesive
Total Thickness: 11.0 mils	Temperature Range: 50°F to 180°F
Tensile Strength: 50 lbs per inch	Adhesion to steel: 75 oz per inch

## Pro® Clear Book Repair Tape (Pro J-Lar II)

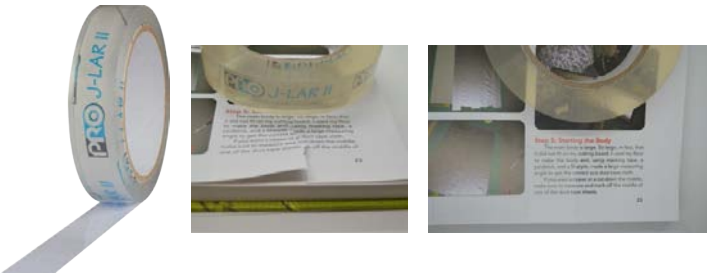

Pro® Clear Book Repair specifically designed for laminating and book repairs where clarity and strength are extremely important. It's also an industrial strength, brilliantly clear film tape developed for use in packaging, carton and package sealing, overlays and laminating, and label protection.

Colors: Clear

Specifications: CID A-A-1684C

### Technical Specs

Backing: Biaxially oriented polypropylene film	Adhesive: Solvent based acrylic
Total Thickness: 3.5 mils	Tensile Strength: 40 lbs per inch
Elongation: 140%	Adhesion to steel: 30 oz per inch

## Pro® Clear Wings



Pro® Clear Wings Book Repair is specifically designed for laminating and book repairs where clarity and strength are extremely important. It's also an industrial strength, brilliantly clear film tape developed for use in packaging, carton and package sealing, overlays and laminating, and label protection

Colors: Clear

Specifications: CID A-A-1684C

### Technical Specs

Backing: Biaxially oriented polypropylene film	Adhesive: Solvent based acrylic
Total Thickness: 3.5 mils	Tensile Strength: 40 lbs per inch
Elongation: 140%	Adhesion to steel: 30 oz per inch



## UGlu® 200 Strips Family Pack

Made in the USA



UGlu® 200 Strips Family Pack features 20mil rubber based mounting adhesive strips with three different sizes in each pack. Common applications for UGlu® are: mounting, bonding, securing, temporary holding and carpet installation. This product adheres well to all woods and metals.

Colors: Transparent

### Technical Specs

Adhesive: Rubber	Total Thickness: 20 mils
Family Pack:(5) 1 in x 2 in, (5) 1 in x 3 in, (5) 1 in x 4 in	Pcs/Case: 1080
Pcs/Pack: 15	Packs/Master: 72

## UGlu® 300 Power Patch

Made in the USA



UGlu® 300 Power Patch features 20mil rubber based mounting adhesive patch 3" x 3". Common applications for UGlu® are: mounting, bonding, securing, temporary holding and carpet installation. This product adheres well to all woods and metals.

Colors: Transparent

### Technical Specs

Adhesive: Rubber	Total Thickness: 20 mils
Power Patch (5) 3in x 3in Strips	Pcs/Case: 720
Pcs/Pack: 5	Packs/Master: 144

## UGlu® 500 1"x60" Roll

Made in the USA



UGlu® 500 Roll features 20mil rubber based mounting adhesive on a roll 1"x5ft or 1"x60in. Common applications for UGlu® are: mounting, bonding, securing, temporary holding and carpet installation. UGlu® is often used in the arts & crafts industry. This product adheres well to all woods and metals.

Colors: Transparent

### Technical Specs

Adhesive: Rubber	Total Thickness: 20 mils
1"x60" Roll on 1" ID Core	1 Roll Per Pack
Clamshell Each Roll	Packs/Master: 48

## UGlu® 600 Dashes Sheets

Made in the USA



UGlu® 600 Dash Sheets features 20mil rubber based mounting adhesive squares 1/2" x 5/8" on sheets. Common applications for UGlu® are: mounting, bonding, securing, temporary holding and carpet installation. UGlu® is often used in the arts & crafts industry. This product adheres well to all woods and metals.

Colors: Transparent

### Technical Specs

Adhesive: Rubber	Total Thickness: 20 mils
Dash Sheets 1/2in x 5/8in squares	40 Dashes per sheet
4 Sheets per envelope/ pack	160 Dashes per envelope/pack
Packs/Master: 144	

\*Not recommended for use on plastics.

## UGlu® 650 Dash Roll

Made in the USA



UGlu® 650 Dashes Roll features 20mil rubber based mounting adhesive squares 1/2" x 5/8" on a convenient roll. Common applications for UGlu® are: mounting, bonding, securing, temporary holding and carpet installation. UGlu® is often used in the arts & crafts industry. This product adheres well to all woods and metals.

Colors: Transparent

### Technical Specs

Adhesive: Rubber	Total Thickness: 20 mils
Dash Roll (200) 1/2 in x 5/8 in squares	200 Dashes Per Roll
Pcs/Pack: 1 roll	Packs/Master: 96

## UGlu® 700 DIY Pack

Made in the USA



UGlu® 700 DIY Pack features 20mil rubber based mounting adhesive pack of 1 roll (1"x60"), 4 dash sheets (1/2"x5/8"), 15 strips (1"x3"). Common applications for UGlu® are: mounting, bonding, securing, temporary holding and carpet installation. UGlu® is often used in the arts & crafts industry. This product adheres well to all woods and metals.

Colors: Transparent

### Technical Specs

Adhesive: Rubber	Total Thickness: 20 mils
DIY Pack (1) 1 in x 60in Roll, (4) 1/2in x 5/8in Dash Sheets, (15) 1 in x 3in Strips	
Pcs/Pack: 20	Packs/Master: 12

## UGlu® 900 Contractor Pack

Made in the USA



UGlu® 900 Contractor Pack features 20mil rubber based mounting adhesive pack of 250 1"x3" strips. Common applications for UGlu® are: mounting, bonding, securing, temporary holding and carpet installation. UGlu® is often used in the arts & crafts industry. This product adheres well to all woods and metals.

Colors: Transparent

### Technical Specs

Adhesive: Rubber	Total Thickness: 20 mils
Contractor Pack (250) 1 in x 3 in Strips	Pcs/Case: 1,500 sheets
Pcs/Pack: 250 roll	Packs/Master: 6

## UGlu® Industrial Roll

Made in the USA



UGlu® Industrial Roll features 20mil rubber based mounting adhesive roll available in 1"x65ft or 3/4"x65ft. Common applications for UGlu® are: mounting, bonding, securing, temporary holding and carpet installation. UGlu® is often used in the arts & crafts industry. This product adheres well to all woods and metals.

Colors: Transparent

### Technical Specs

Adhesive: Rubber	Total Thickness: 20 mils
UGlu® 20mil 3/4x65FT Slit Imperial, Shrink wrapped with Front & Back Roll Label	
UGlu® 20mil 1x65FT Slit Imperial, Shrink wrapped with Front & Back Roll Label	

\*Not recommended for use on plastics.



## Pro® 795 General Purpose Masking Tape

Made in the USA



Pro® 795 is a general purpose masking tape. Pro® 795 provides excellent adhesion to a wide variety of surfaces in a number of fields including, light bundling, packaging and closing, and light duty masking.

Colors: Natural

Specifications: ASTM D 6123/D 6123M-97 (2012), Type I

### Technical Specs

Backing: Crepe paper	Adhesive: Solvent Based Natural Rubber
Total Thickness: 4.3 mils	Temperature Range: 60°F - 150°F
Tensile Strength: 16 lbs per inch	Adhesion to steel: 35 oz per inch

## Pro® 796 pH Neutral Masking



Pro® 796 premium grade, highly versatile, pH Neutral masking tape. Pro® 796 is ideal tape for light-duty packaging. Well suited for paint masking, general sealing, and holding, reinforcing and splicing applications.

Colors: Natural/Tan

Specifications: A-AA883-B Type L PPP-T-42C Type L

### Technical Specs

Backing: Impregnated crepe kraft paper	Adhesive: Natural rubber/resin
Total Thickness: 6.5 mils	Temperature Range: 340°F for 30 min.
Tensile Strength: 25 lbs per inch	Adhesion to steel: 35 oz per inch

## Pro® Premium Mask Black

Made in the USA



Pro® Premium Black Mask tape is a medium crepe paper masking tape coated with pressure sensitive rubber based adhesive. Pro® Premium Black Mask is designed for light-weight packaging, bag locking, decorative edging and marking. Pro® Premium Black Mask can be used in masking off areas in acrylic and watercolor painting.

Colors: Black

### Technical Specs

Backing: Medium crepe paper	Adhesive: Synthetic rubber/resin
Total Thickness: 5.7 mils	Temperature Range: 40°F to 150°F
Tensile Strength: 19 lbs per inch	Adhesion to steel: 32 oz per inch

## Pro® 46 Colored Masking Tape

Made in the USA



Pro® 46 is a rubber based colored crepe paper tape. Pro® 46 is used on a wide variety of smooth substrates as a printed or unprinted general purpose tape. Pro® 46 can be used for packaging, bundling, binding, holding, splicing, banding, labeling, color coding, decorating and identification.

Colors: Black, Light Blue, Light Green, Orange, Red, White, Yellow, Grey, Dark Blue, Dark Green, Pink, Purple.

Specifications: ASTM D6123/D6123M-07, Type II. Conforms to ASTM D-4236

### Technical Specs

Backing: Colored Crepe Paper	Adhesive: Rubber based
Total Thickness: 4.7 mils	Temperature Range: 60°F to 150°F
Tensile Strength: 18 lbs per inch	Adhesion to steel: 33 oz per inch

## Artist Tape

Made in the USA



Artist Tape is a premium flatback paper tape. Artist Tape is used for color coding, labeling. Artist Tape is printable with: flexo inks, markers, pens and pencils.

Colors: White, Blue, Black, Green, Orange, Yellow, Red, FL Orange, FL Green, FL Pink, FL Yellow

Specifications: ASTM D6123/D6123M-07, Type II. ASTM D-4236 (except FL colors)

### Technical Specs

Backing: Flatback paper	Adhesive: Synthetic Rubber
Total Thickness: 5.8 mils	Temperature Range: 40°F to 150°F
Tensile Strength: 30 lbs per inch	Adhesion to steel: 57 oz per inch





**ATG Tape** is a non-yellowing adhesive transfer tape where the adhesive is “reverse wound” meaning the adhesive is wound on the outside of the roll, ideal for use in an adhesive transfer gun where the tape is threaded around the roller at the nose of the gun adhesive side out.

Applications/Uses: Picture Framing & Matting Boards, Mounting Promotional Products & Posters, Scrapbooking, Gift Wrapping, Card Making, Invitations, Sealing Envelopes, Fabric Mounting, Arts & Crafts Projects.

Recommended Bonding Surfaces: Glass, Wood, Papers, Paint, Plastics

To operate the ATG gun you squeeze the trigger, releasing the roller and then press the nose against the surface to be glued and pull back. The roller rolls out the double-sided adhesive, peeling up the liner as it goes, threading it back into the gun. Please see our instructional video on how to load the ATG gun at: <https://vimeo.com/176750163>

**Pro® 154 ATG**  
Made in the USA



Pro® 154 ATG 2 mil Adhesive Transfer Tape. Pro® 154 ATG is an excellent adhesive for flying splices on paper, films, and foil. This product can be used for laminating, mounting and nameplate applications, aluminum foil identification plates, and miscellaneous holding.

Colors: Clear

**Technical Specs**

Adhesive: Acrylic	Total Thickness: 2.0 mils (without liner)
Temperature Range: -20°F to 150°F	Adhesion to steel: 32 oz. per inch
Heat Resistance: 250°F Length: 36yds, 60yds	
Width: 1/2", 3/4", 1/4" Core: 1" I.D. Plastic Core	
36yd & 60yd Dispenser: Pro ATG HD Dispenser	

**Pro® ATG HD Dispenser**



Pro® ATG HD Dispenser is an Adhesive Transfer Tape Dispenser with Extended Nose Works for All Sizes





**Pro® 99**  
Made in the USA



Pro® 99 Polyester Fiber Film Tape. Pro® 99 is a semi-transparent tape featuring a high tack, aggressive adhesive and hand tearable film/fiber backing. It can be used for general purpose sealing and attaching, especially used on treated paper overwraps and other hard-to-stick-to surfaces. Pro® 99 was designed for use in holding and insulation applications during transformer and coil manufacturing.

Colors: Natural

Specifications: UL Listed (E82910), Insulation class 130°C, Dielectric Strength 5,000 volts

**Technical Specs**

Backing: 5 mils Polyester Film, Non-woven	
Adhesive: Pressure sensitive rubber resin	Total Thickness: 5.0 mils
Tensile Strength: 60 lbs per inch	Elongation: 100%
Adhesion to steel: 35 oz per inch	

**Pro® 180**  
Made in the USA



Pro® 180 is a filament reinforced strapping tape. Pro® 180 is a utility grade fiberglass reinforced tape designed for the majority of packaging, palletizing and unitizing applications.

Colors: Clear

**Technical Specs**

Backing: Biaxially oriented polypropylene film	
Adhesive: Synthetic rubber resin	Total Thickness: 4.0 mils
Tensile Strength: 100 lbs per inch	Elongation: 3%
Adhesion to steel: 48 oz per inch	



Polyester fiber tape for attaching book jacket covers



## Shurtape® J-Lar Library

Made in the USA



Shurtape Jlar Library is a polypropylene clear to the core tape. Shurtape Jlar Library is hand tearable. Over-lamination. Label protection. Light carton closure paper repair/mending and holding applications. Ideal for use with counter and desk dispenser units.

Colors: Clear-to-the-core

### Technical Specs

Backing: Biaxially oriented polypropylene film	
Adhesive: Solvent based acrylic	Total Thickness: 2.6 mils
Temperature Range: -20°F to 180°F	Tensile Strength: 24 lbs per inch
Adhesion to steel: 30 oz per inch	

## Cable Path®

Made in the USA



A premium vinyl coated cloth tape that is coated on both edges with a premium cured rubber adhesive system. The center portion has a smooth surface for pulling cable and wire through. The high performance adhesive will hold firmly for extended periods of time on most surfaces and remove without residue. The center portion has a smooth surface for pulling cable and wire through.

Colors: Yellow, Black, Yellow Printed Black, Yellow Safety Stripes

### Technical Specs

Backing: Premium Cotton Weave	Adhesive: Synthetic rubber based
Total Thickness: 11 mils	Temperature Range: 50°F to 180°F
Tensile Strength: 50 lbs per inch	Adhesion to steel: 75 oz per inch

## Pro® Metric Measurement Tape

Made in the USA



Pro® Measurement tape is a premium kraft paper tape used as an adhesive backed, repositionable ruler. Metric is perforated every 20 centimeters. Pro® Measurement tape is a premium kraft paper tape used as an adhesive backed, repositionable ruler. This product is great for tough situations where you can't hold a tape measure.

Colors: Yellow Printed Black

### Technical Specs

Backing: Flatback paper	Adhesive: Synthetic rubber
Total Thickness: 5.9 mils	Temperature Range: 40°F to 150°F
Tensile Strength: 30 lbs per inch	Adhesion to steel: 57 oz per inch

## Pro® Imperial Measurement Tape

Made in the USA



Pro® Measurement tape is a premium kraft paper tape used as an adhesive backed, repositionable ruler. Imperial is perforated every 12" (ruler). Pro® Measurement tape is a premium kraft paper tape used as an adhesive backed, repositionable ruler. This product is great for tough situations where you can't hold a tape measure.

Colors: Yellow Printed Black

### Technical Specs

Backing: Flatback paper	Adhesive: Synthetic rubber
Total Thickness: 5.8 mils	Temperature Range: 40°F to 150°F
Tensile Strength: 30 lbs per inch	Adhesion to steel: 57 oz per inch

## Pro Glow® Dots

Made in the USA



Pro Glow® Dots has a non-radioactive chemical light source incorporated into a flexible vinyl film that glows in total darkness after exposure to artificial or natural light. The photoluminescent film light source is designed to absorb energy from any nearby ambient light such as fluorescent lamps or sunlight. Once the source of extraneous light is removed, Pro Glow® Dots film immediately emits a light of its own. There is no limit to the number of times this product can be recharged. When fully charged, Pro Glow® Dots provides positive luminance for up to 10 hours. Pro Glow® Dots is designed for indoor safety and egress marking tapes and signage.

Colors: Glow

Specifications: Exceeds PSPA Class B standards

### Technical Specs

Backing: Vinyl film	Total Thickness: 15.0 mils
Temperature Range: -20°F to 220°F	Adhesion to steel: 96 oz. per inch

## Pro Glow® 5 yds. & 10 yds.

Made in the USA



Pro Glow® has a non-radioactive chemical light source incorporated into a flexible vinyl film that glows in total darkness after exposure to artificial or natural light. The photoluminescent film light source is designed to absorb energy from any nearby ambient light such as fluorescent lamps or sunlight. Once the source of extraneous light is removed, Pro Glow® film immediately emits a light of its own. There is no limit to the number of times this product can be recharged. When fully charged, Pro Glow® provides positive luminance for up to 10 hours. Pro Glow® is designed for indoor safety and egress marking tapes and signage.


Colors: Glow

Specifications: Exceeds PSPA Class B standards

### Technical Specs

Backing: Vinyl film	Total Thickness: 15.0 mils
Temperature Range: -20°F to 220°F	Adhesion to steel: 96 oz. per inch

## Pro® Sheen



Pro® Sheen is a premium grade metalized polyester film in seven vibrant colors. Uses include decoration, color-coding, cueing, and splicing.

Colors: Silver, Black, Blue, Gold, Red, Green

Specifications: Meets Federal specifications #LT-100B Type II

### Technical Specs

Backing: Metalized Polyester	Adhesive: Acrylic
Total Thickness: 2.1 mils	Temperature Range: Up to 300°F
Tensile Strength: 24 lbs per inch	Elongation: 100%



Pro Tapes & Specialties® is a tape manufacturer and supplier. For over 40 years we've produced our own quality products in addition to being contracted to improve productivity and profitability with our converting, supply chain and inventory management solutions for some of the most well-known brands in adhesives.

Our School & Library Supply product line offers a broad range of tapes that are safe to use on artwork, books and walls and have been manufactured to be clean removable, pH Neutral and acid free. Many of our tapes are user friendly, and ideal for students, teachers & librarians and conform to ASTM 4236. We carry a wide selection of tapes engineered for utility or decorative purposes. Our tapes are perfect for DIY end-use, craftsmen looking for reliable adhesives or purchasing agent procuring OEM commercial machine applied custom width and length rolls.



621 Route 1 South,  
North Brunswick, NJ 08902

Toll Free: (800) 345-0234  
Email: [sales@protapes.com](mailto:sales@protapes.com)  
[www.protapes.com](http://www.protapes.com)