

Tapes & Specialties

Arts & Crafts

ADHESIVE TAPES FOR THE ARTS & CRAFTS INDUSTRY



210

EEO

ELO

EEO

ERO

1

210

210

Table of Contents

Artist Tape Premium Flatback Paper Tape Page 1
Pro® 46 Rubber Based Colored Crepe Paper TapePage 1
Pro® 795 General Purpose Masking Tape Page 2
Pro® Drafting Industrial Grade Masking TapePage 2
Pro® 796 Premium Grade, Highly Versatile, pH Neutral Masking TapePage 2
Pro® Premium Black Mask Medium Crepe Paper Masking Tape Page 2
Pro® Photo Paper Photographic Masking Tape Page 3
Pro® Scenic 714 Blue Mask 14-Day Painter's Tape Page 3
Pro® Measurement Ruler Printed Paper TapePage 3
Pro® Chart Tape Premium Flatback Paper Tape Page 3
Pro® Framers Premium Polyethylene Coated Cloth Tape Page 4
Pro® Silk Screen Polyethylene Coated Cloth Sealing Tape Page 4
Pro® 139 Specialty Grade Duct Tape Page 4
Pro® 110 9 Mil General Purpose Duct Tape Page 4
Pro Gaff® Matte Cloth Tape Page 5
Pro® Spike Stacks Matte Cloth TapePage 5
Pro® 3016 1/16" Double Coated Foam Tape Page 6
Pro® 3032 1/32"Double Coated Foam Tape Page 6
Pro® 406 Double Coated Polyester Tape Page 6
UGlu [™] Double Coated TapePages 7, 8, 9, 10
Pro [®] Sheen Premium Grade Metalized Polyester Film Tape Page 11
· · · · · · · · · · · · · · · · · · ·
Pro [®] Glow Vinyl Glow-In-The-Dark TapePage 11
Pro [®] Glow Vinyl Glow-In-The-Dark TapePage 11
Pro® Glow Vinyl Glow-In-The-Dark Tape Page 11 Pro® Seal 300 General Purpose Carton Sealing Tape Page 11

ALL COL



Artist Tape Made in the USA



Artist Tape is a premium flatback paper tape. Artist Tape is used for color coding, labeling. Artist Tape is printable with: flexo inks, markers, pens and pencils. White color is pH Neutral.

Colors: White, Blue, Black, Green, Orange, Yellow, Red, FL Orange, FL Green, FL Pink, FL Yellow

Specifications: ASTM D6123/D6123M-07, Type II. ASTM D-4236 (except fl colors)

Technical Specs

Backing: Flatback paper	Adhesive: Synthetic rubber
Total Thickness: 5.8 mils	Temperature Range: 40°F to 150°F
Tensile Strength: 30 lbs. per inch	Elongation %: 2.5
Adhesion to steel: 57 oz. per in	



Mask and paint with Artist Tape

Pro[®] 46 Colored Masking Tape Made in the USA



Pro[®] 46 is a rubber based colored crepe paper tape. Pro[®] 46 is used on a wide variety of smooth substrates as a printed or unprinted general purpose tape. Pro[®] 46 can be used for packaging, bundling, binding, holding, splicing, banding, labeling, color coding, decorating and identification.

Colors: Black, Light Blue, Light Green, Orange, Red, White, Yellow, Grey, Dark Blue, Dark Green, Pink, Purple.

Specifications: ASTM D6123/D6123M-07, Type II. Conforms to ASTM D-4236

Backing: Colored crepe paper	Adhesive: Rubber based
Total Thickness: 4.7 mils	Temperature Range: 60°F to 150°F
Tensile Strength: 18 lbs. per inch	Adhesion to steel: 33 oz. per inch



Tape art created with Artist Tape By Rebecca Sarkozy



Pro® 795 General Purpose Masking Tape Made in the USA



Pro[®] 795 is a general purpose masking tape. Pro[®] 795 provides excellent adhesion to a wide variety of surfaces in a number of fields including, light bundling, packaging and closing, and light duty masking.

Colors: Natural

Specifications: ASTM D 6123/D 6123M-97 (2012), Type I

Technical Specs

Backing: Crepe paper	Adhesive: Solvent based natural rubber
Total Thickness: 4.3 mils	Temperature Range: 60°F - 150°F
Tensile Strength: 16 lbs. per inch	Adhesion to steel: 35 oz. per inch

Pro® 796 pH Neutral Masking



Pro[®] 796 is a premium grade, highly versatile, pH Neutral masking tape. Pro[®] 796 is an ideal tape for light-duty packaging. Well suited for paint masking, general sealing, and holding, reinforcing and splicing applications.

Colors: Natural/Tan

Specifications: A-AA883-B Type L PPP-T-42C Type L

Technical Specs

Backing: Impregnated crepe kraft paper	Adhesive: Natural rubber/resin
Total Thickness: 6.5 mils	Temperature Range: 340°F for 30 minutes
Tensile Strength: 25 lbs. per inch	Adhesion to steel: 35 oz. per inch

Pro[®] Drafting Made in the USA



Pro[®] Drafting tape is a masking tape with a specially formulated adhesive system, designed for the drafting and stationary trades. Pro[®] Drafting tape minimizes residues and resists water solvents and oils along with having an excellent shelf-life. Not designed or guaranteed for exacting industrial masking spray, painting or oven baking applications.

Colors: Natural

Specifications: UU-T-93D, AA-194-C

Technical Specs

Backing: Crepe paper	Adhesive: Rubber resin
Total Thickness: 7.0 mils	Tensile Strength: 18 lbs. per inch
Elongation %: 7	Adhesion to steel: 18 oz. per inch

Pro[®] Premium Mask Black Made in the USA



Pro[®] Premium Mask Black tape is a medium crepe paper masking tape coated with pressure sensitive rubber based adhesive. Pro[®] Premium Mask Black is designed for light-weight packaging, bag locking, decorative edging and marking. Pro[®] Premium Mask Black can be used in masking off areas in acrylic and watercolor painting. Pro[®] Premium Mask Black is pH Neutral.

Colors: Black

Backing: Medium crepe paper	Adhesive: Synthetic rubber/resin
Total Thickness: 5.7 mils	Temperature Range: 40°F to 150°F
Tensile Strength: 19 lbs. per inch	Adhesion to steel: 32 oz. per inch

Pro® Photo Made in the USA



Pro[®] Photo is a paper photographic masking tape. Pro[®] Photo tape is engineered for quality photographic re-production work- cropping and edging negatives; positioning negatives for contact printing; sealing camera bellows and film holders against light leaks.

Colors: Black

Technical Specs

Backing: Impregnated paper	Adhesive: Synthetic rubber
Total Thickness: 6.1 mils	Tensile Strength: 21 lbs. per inch
Elongation %: 7	Adhesion to steel: 50 oz. per inch

Pro[®] Metric Measurement Tape Made in the USA



Pro[®] Measurement Tape is a premium kraft paper tape used as an adhesive backed, repositionable ruler that is perforated every 20 centimeters. This product is great for tough situations where you can't hold a tape measure.

Colors: Yellow Printed Black

Technical Specs

Backing: Flatback paper	Adhesive: Synthetic rubber
Total Thickness: 5.8 mils	Temperature Range: 40°F to 150°F
Tensile Strength: 30 lbs. per inch	Adhesion to steel: 57 oz. per inch

Pro[®] Scenic 714 Blue Mask Made in the USA



Pro[®] Scenic 714 Blue Mask is a 14-day painter's tape. Pro[®] Scenic 714 Blue Mask should be used wherever masking will be exposed to weather/outdoor conditions, interior masking of windows (where adhesive will be directly exposed to sunlight). Pro[®] Scenic 714 Blue Mask is compatible for use on lacquer or polyurethane - coated surfaces, unfinished wood, wallpaper and new/unpainted or freshly painted wallboard.

Colors: Blue

Technical Specs

Backing: Fine structured crepe paper	Adhesive: Synthetic rubber
Total Thickness: 5.7 mils	Temperature Range: 50°F to 200°F
Tensile Strength: 32 lbs. per inch	Elongation %: 7
Adhesion to steel: 26 oz. per inch	

Pro[®] Imperial Measurement Tape Made in the USA



Pro[®] Measurement Tape is a premium kraft paper tape used as an adhesive backed, repositionable ruler that is perforated every 12" (ruler). This product is great for tough situations where you can't hold a tape measure.

Colors: Yellow Printed Black

Backing: Flatback paper	Adhesive: Synthetic rubber
Total Thickness: 5.8 mils	Temperature Range: 40°F to 150°F
Tensile Strength: 30 lbs. per inch	Adhesion to steel: 57 oz. per inch



Pro[®] Chart Tape Made in the USA



Pro[®] Chart Tape is a premium flatback paper tape used for marking lines on charts, dry erase boards, and maps, as well as color coding and labeling. Pro[®] Chart Tape can be written on with markers, pens and pencils. Pro[®] Chart Tape removes cleanly and safely (will not stain or ghost after removal) from most surfaces.

Colors: Black, Blue, Green, Orange, Red, White, Yellow

Technical Specs

Backing: Flatback paper	Adhesive: Synthetic rubber
Total Thickness: 5.8 mils	Temperature Range: 40°F to 150°F
Tensile Strength: 30 lbs. per inch	Adhesion to steel: 57 oz. per inch

Pro[®] Framers Tape Made in the USA



Pro[®] Framers Tape is a premium polyethylene coated cloth tape. Pro[®] Framers Tape was developed specifically for mounting, matting and framing artwork and prints.

Colors: White

Technical Specs

Adhesive: pH Neutral rubber resin	Total Thickness: 11 mils
Tensile Strength: 35 lbs. per inch	Adhesion to steel: 75 oz. per inch

Pro® Silk Screen



Pro[®] Silk Screen is a quality-grade polyethylene coated cloth sealing tape. Designed for use in high-demand silk screen processing, can and barrel sealing, carpet pad splicing and waterproof packaging. Pro[®] Silk Screen demonstrates great resistance to oil and solvents.

Colors: White

Technical Specs

Backing: Polyethylene coated cloth	Adhesive: Natural rubber
Total Thickness: 11.8 mils (+/- 0.4 mils)	Tensile Strength: 31 lbs. per inch
Adhesion to steel: 39 oz. per inch	

Pro[®] Duct 139 Made in the USA



Pro[®] 139 is a specialty grade duct tape available in 4 brilliant fluorescent colors. Applications include bundling, sealing cartons, binding books, repairing seats, color coding, and splicing and repairing. Pro[®] 139 is also used in the hospitality, motion picture, audio visual industry, motor sports and the floral industry.

Colors: FL Green, FL Orange, FL Yellow, FL Pink

Backing: Waterproof, polyethylene film with a cloth carrier	
Adhesive: Natural rubber	Total Thickness: 9.0 mils
Temperature Range: 50°F to 200°F	Tensile Strength: 22 lbs. per inch
Adhesion to steel: 50 oz. per inch	

Pro[®] Duct 110 Made in the USA



Pro[®] 110 is a 9 mil general purpose duct tape. Pro[®] Duct 110 is commonly used for bundling, patch¬ing, mending, color coding, general repair, sealing off polyeth¬ylene waste disposal bags, heavy-duty box sealing, general purpose abatement and contractor uses.

Colors: Black, Blue, Green, Red, Yellow, Olive Drab, Silver, Tan, White, Brown, Burgundy

Technical Specs

Backing: PE coated cloth	Adhesive: Natural rubber
Total Thickness: 9.0 mils	Temperature Range: 40°F to 200°F
Tensile Strength: 24 lbs. per inch	Adhesion to steel: 70 oz. per inch



Pro[®] Duct 110 used to personalize a mailbox for a weather resistant design

Pro Gaff[®] Made in the USA



Pro Gaff® is a matte cloth tape with a rubber based adhesive system. Pro Gaff® is used for temporary holding of light fixtures, dance floor splicing, wire and cable hold down, mark¬ing and labeling equipment cases. Pro Gaff® is available in high visibility colors for marking of stairs, exits or sets. Twenty available colors make it easy to match Pro Gaff® to any carpet color.

Colors: Black, White, Blue, Electric Blue, Green, Purple, Yellow, Red, Tan, Teal, Olive Drab, Brown, Burgundy, Grey, FL Green, FL Orange, FL Yellow, FL Pink, FL Blue, Chroma-Green

Technical Specs

Backing: Cotton cloth	Adhesive: Synthetic rubber based
Total Thickness: 11.0 mils	Temperature Range: 50°F to 180°F
Tensile Strength: 50 lbs. per inch	Elongation %: 4
Adhesion to steel: 75 oz. per inch	

Pro[®] Spike Stacks Made in the USA



Pro[®] Spike Stack is a rubber based impregnated cloth tape with a matte finish conveniently packaged as 4 FL Colors in a read to use "stack". Pro[®] Spike Stack is used for temporary holding of light fixtures, dance floor splicing, wire and cable hold down, marking and labeling equipment cases. Pro[®] Spike Stack is available in high visibility colors for marking of stairs, exits or sets.

Colors: FL Green, FL Orange, FL Yellow, FL Pink

Backing: Cotton cloth	Adhesive: Synthetic rubber based
Total Thickness: 11.0 mils	Temperature Range: 50°F to 180°F
Tensile Strength: 50 lbs. per inch	Adhesion to steel: 75 oz. per inch



Pro[®] 3016 Made in the USA



Pro[®] 3016 is a 1/16" closed cell polyethylene foam coated on both sides with an aggressive rubber based pressure sensitive adhesive. Pro[®] 3016 is used for general purpose bonding applications.

Colors: White on a White Liner

Technical Specs

Adhesive: Rubber	Total Thickness: 1/16 in
Temperature Range: up to 180°F	Tensile Strength: 145 lbs. per inch
Elongation %: 339	Adhesion to steel: 137 oz. per inch



Pro® 3032

Pro[®] 3032 is a 1/32" closed cell polyethylene foam coated on both sides with an aggressive rubber based pressure sensitive adhesive. Pro[®] 3032 is used for general purpose bonding applications

Colors: White on a White Liner

Technical Specs

Adhesive: Rubber	Total Thickness: 1/32 in
Temperature Range: up to 180°F	Tensile Strength: 213 lbs. per inch
Elongation %: 355	Adhesion to steel: 137 oz. per inch



Pro[®] 406 is a double coated polyester tape. Pro[®] 406 is a general purpose rubber based adhesive tape designed for bonding to a variety of polyurethane and polyethylene foams, felt, rubber, sponge, cork, abrasive materials and gasket materials

Colors: White

Technical Specs

Adhesive: Rubber

Carrier: 60# Polycoated lay-flat silicone treated release liner

Tensile strength: 10 lbs. per inch Application Temperature: 41°F to 104°F

UGlu[®] 200 Strips Family Pack



UGlu[®] 200 Strips Family Pack features 20mil rubber based mounting adhesive strips with three different sizes in each pack. Mounting, bonding, securing, temporary holding and carpet installation. UGlu[®] is often used in the arts & crafts industry for mounting, bonding, securing and temporary holding.

Colors: Transparent

Technical Specs

Adhesive: Rubber	Total Thickness: 20 mils
Family Pack: (5) 1 in x 2 in, (5) 1 in x 3 in, (5) 1 in x 4 in	
Pcs/Case: 1080	Pcs/Pack: 15
Packs/Master: 72	

UGlu® 300 Power Patch





UGlu[®] 300 Power Patch features 20mil rubber based mounting adhesive patch 3" x 3". Mounting, bonding, securing, temporary holding and carpet installation. UGlu[®] is often used in the arts & crafts industry for mounting, bonding, securing and temporary holding.

Colors: Transparent

Technical Specs

Adhesive: Rubber	Total Thickness: 20 mils
Power Patch (5) 3in x 3in Strips	Pcs/Case: 720
Pcs/Pack: 5	Packs/Master: 144



DIY wreath made with Pro® 46 and UGlu®



UGlu[®] 500 Roll Made in the USA



UGlu® 500 Roll features 20mil rubber based mounting adhesive on a roll 1"x5ft or 1"x60in. Mounting, bonding, securing, temporary holding and carpet installation. UGlu® is often used in the arts & crafts industry for mounting, bonding, securing and temporary holding.

Colors: Transparent

Technical Specs

Adhesive: Rubber	Total Thickness: 20 mils
(5) 3in x 3in Strips	Pcs/Case: 240
Pcs/Pack: 5	Packs/Master: 48

UGlu[®] 600 Dashes Sheets Made in the USA



UGlu[®] 600 Dash Sheets features 20mil rubber based mounting adhesive squares 1/2" x 5/8" on sheets. Mounting, bonding, securing, temporary holding and carpet installation. UGlu[®] is often used in the arts & crafts industry for mounting, bonding, securing and temporary holding.

Colors: Transparent

Technical Specs

Adhesive: Rubber	Total Thickness: 20 mils
Dash Sheets 1/2in x 5/8in squares	40 Dashes per sheet
4 Sheets per envelope/pack	160 Dashes per envelope/pack
144 packs per master	



*Not recommended for use on plastics.

UGlu® 650 Dashes Roll Made in the USA



UGlu[®] 650 Dashes Roll features 20mil rubber based mounting adhesive squares 1/2" x 5/8" on a convenient roll. Mounting, bonding, securing, temporary holding and carpet installation. UGlu[®] is often used in the arts & crafts industry for mounting, bonding, securing and temporary holding.

Colors: Transparent

Technical Specs

Adhesive: Rubber	Total Thickness: 20 mils
Dash Roll, 1/2 in x 5/8 in squares	200 Dashes per Roll
Pcs/Pack: 1 roll	Packs/Master: 96

UGlu[®] 700 DIY Pack Made in the USA



UGlu[®] 700 DIY Pack features 20mil rubber based mounting adhesive pack of 1 roll (1"x60"), 4 dash sheets (1/2"x5/8"), 15 strips (1"x3"). Mounting, bonding, securing, temporary holding and carpet installation. UGlu[®] is often used in the arts & crafts industry for mounting, bonding, securing and temporary holding.

Colors: Transparent

Adhesive: Rubber	Total Thickness: 20 mils
DIY Pack (1) 1in x 60in Roll, (4) 1/2ir	א 5/8in Dash Sheets, (15) 1in x 3in Strips
Pcs/Pack: 20	Packs/Master: 12



UGlu® DYI Pack used to assemble favor/gift tags



UGlu[®] 900 Contractor Pack Made in the USA





UGlu[®] 900 Contractor Pack features 20mil rubber based mounting adhesive pack of 250 1"x3" strips. Mounting, bonding, securing, temporary holding and carpet installation. UGlu[®] is often used in the arts & crafts industry for mounting, bonding, securing and temporary holding.

Colors: Transparent

Technical Specs

Adhesive: Rubber	Total Thickness: 20 mils
Contractor Pack (250) 1 in x 3 in Strips	Pcs/Case: 1,500 sheets
Pcs/Pack: 250 roll	Packs/Master: 6

UGlu[®] Industrial Roll Made in the USA




UGlu® Industrial Roll features 20mil rubber based mounting adhesive roll available in 1"x65ft or 3/4"x65ft. Mounting, bonding, securing, temporary holding and carpet installation. UGlu® is often used in the arts & crafts industry for mounting, bonding, securing and temporary holding.

Colors: Transparent

Technical Specs

Adhesive: Rubber	Total Thickness: 20 mils
UGlu® 20mil 3/4x65FT Slit Imperial, Shrink wrapped with Front & Back Roll Label	
UGlu® 20mil 1x65FT Slit Imperial, Shrink wrapped with Front & Back Roll Label	

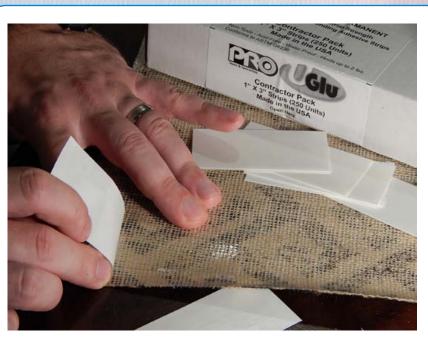

UGlu[®] Contractor Pack of 1"x3" Strips are easy to apply and adhere to most surfaces

*Not recommended for use on plastics.

Pro[®] Sheen



Pro[®] Sheen is a premium grade metalized polyester film available in seven vibrant colors. Uses include decoration, color-coding, cueing, and splicing.

Colors: Silver, Black, Blue, Gold, Red, Green

Specifications: Meets Federal specifications #LT-100B Type II.

Technical Specs

Backing: Metalized polyester	Adhesive: Acrylic
Total Thickness: 2.1 mils	Temperature Range: Up to 300°F
Tensile Strength: 24 lbs. per inch	Elongation: 100%

Pro[®] Seal 300 Made in the USA



Pro[®] Seal 300 is a polypropylene general purpose carton sealing tape. Excellent for all general purpose hot melt carton sealing applications. Designed for smooth, easy dispensing.

Colors: Clear, Tan

Technical Specs

Backing: Biaxially-oriented polypropylene film	
Adhesive: Synthetic rubber / resin	Total Thickness: 1.8 mils
Tensile Strength: 27 lbs. per inch	Elongation %: 70
Adhesion to steel: 32 oz. per inch	

Pro Glow[®] Made in the USA



Pro Glow[®] has a non-radioactive chemical light source incorporated into a flexible vinyl film that glows in total darkness after exposure to artificial or natural light. The photoluminescent film light source is designed to absorb energy from any nearby ambient light such as fluorescent lamps or sunlight. Once the source of extraneous light is removed, Pro Glow[®] film immediately emits a light of its own. There is no limit to the number of times this product can be recharged. When fully charged, Pro Glow[®] provides positive luminance for up to 10 hours. Pro Glow[®] is designed for indoor safety and egress marking tapes and signage.

Colors: Glow

Specifications: Exceeds PSPA Class B standards

Backing: Vinyl film	Total Thickness: 15.0 mils
Temperature Range: -20°F to 220°F	Adhesion to steel: 96 oz. per inch
Adhesion to steel: 26 oz. per inch	



Fun meets function with Pro[®] Glow



Pro[®] 154 ATG Made in the USA



Pro[®] 154 ATG is a 2 mil Adhesive Transfer Tape. Pro[®] 154 ATG is an excellent adhesive for flying splices on paper, films and foil. This product can be used for laminating, mounting and nameplate applications, aluminum foil identification plates, and miscellaneous holding. Pro[®] 154 ATG is excellent for scrapbooking and card making along with picture framing applications.

Colors: Transparent

Technical Specs

Adhesive: Acrylic	Total Thickness: 2.0 mils (without liner)
Temperature Range: -20°F to 150°F	Adhesion to steel: 32 oz per inch


Pro® ATG HD Dispenser



Pro[®] ATG HD Dispenser is an Adhesive Transfer Tape Dispenser with extended nose that works for all sizes.

Colors: Blue



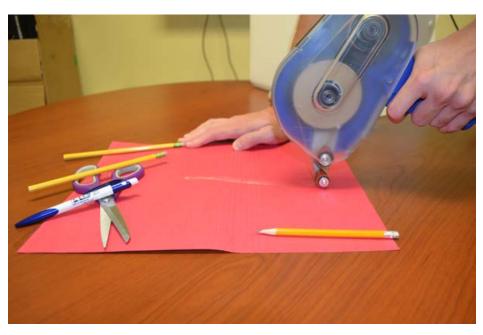

Easy application of Pro[®] 154 ATG Tape with Pro[®] ATG HD Dispenser. Pro[®] 154 ATG Tape is safer and less messy than liquid glues.



HEY TAPE-IES!

Let's get inspired. This is no ordinary blog. Here at Crafters Corner we primarily focus on how-to's, DIY's, crafts, art pieces, tips & tricks, etc. all using the "tape on" or "tape off" concept. Tape is either the main element of the design of the project or is an effective marking & masking tool.

At Crafters Corner anyone can be a crafter, a maker, a do-it yourselfer. We want to inspire the "un-crafty", the last minute planner, the family, the office, the teacher, the community, etc., because crafting is not limited to any one audience. So say...YES I CAN! At Crafters Corner feedback and comments are encouraged. We want Crafters Corner to be a community for those embracing their creativity. So come on everyone, what are you waiting for? Embrace your imaginative side. We've made it easy to be a "crafter"!

Join our blog at: https://www.protapes.com/blog/category/crafters-corner/



HOW TO UPGRADE YOUR THANSKGIVING TABLE SETTING WITH A LITTLE LOVE, FUN AND PRO TAPES®! Dovember 13, 2018 Crafters Corner Rebecca Sarkozy, Crafters Corner Artist



DIY GRADUATION CLASS RING FAVOR TAGS
U June 22, 2018
Graduation Crafts, UGLU
Rebecca Sarkozy, Crafters Corner Artist



Our Arts & Crafts product line offers a broad range of tapes that are safe to use on artwork. We carry a wide selection of tapes engineered for utility or decorative purposes. Our tapes are ideal for fine art and DIY end-use.





We offer a comprehensive selection of premium adhesive tapes from pH Neutral double sided tape to decorative mylar tape. Whether you're masking, hinging, adhering, working on a mural or canvas, Pro Tapes[®] is well stocked to be the only supplier for all your tape essentials.

Pro Tapes & Specialties® 621 Route 1 South North Brunswick, NJ 08902 Toll Free: (800) 345-0234 sales@protapes.com www.protapes.com